

VENT SYSTEMS EAVES COMB FILLER G1275

DESCRIPTION

The VENT SYSTEMS Eaves Comb Filler G1275 is designed with flexible fingers which adjust to fill the gaps left when using profiled tiles or steel roof cladding. This prevents entry by birds and large insects beneath the tiles.

FEATURES

- More cost-effective than using purpose-made profiled fillers.
- Allows free-flow of air into the roof cavity, reducing the risk of moisture build-up.
- Profiles to the underside of the roof covering.
- 1m lengths for ease of installation.

SCOPE OF USE

- Commercial and residential application.
- Suitable for use on all roof types.

WARRANTY

- 30 years

MAINTENANCE

- No maintenance requirements.

SPECIFICATIONS

Colours	Black
Packing details	50 Meters - 50x1 Meter lengths per box
Weight	4g per box
Material	Polyethylene
Manufacturing process	Injection moulded

VENT SYSTEMS Eaves Comb Filler G1275



VENT SYSTEMS Eaves Comb Filler G1275 with VENT SYSTEMS Over Fascia Vent G1200N




VENT SYSTEMS EAVES COMB FILLER G1275

INSTALLATION

1. The VENT SYSTEMS G1275 Eaves Comb Filler should be nailed or screwed to the top of the fascia board or over-fascia vent through the fixing holes provided along the full length of the eaves and joined where necessary.
2. It can be fixed over a paper support tray if required.

Figure A: VENT System G1200N with VENT Systems Eaves Comb Filler - G1275

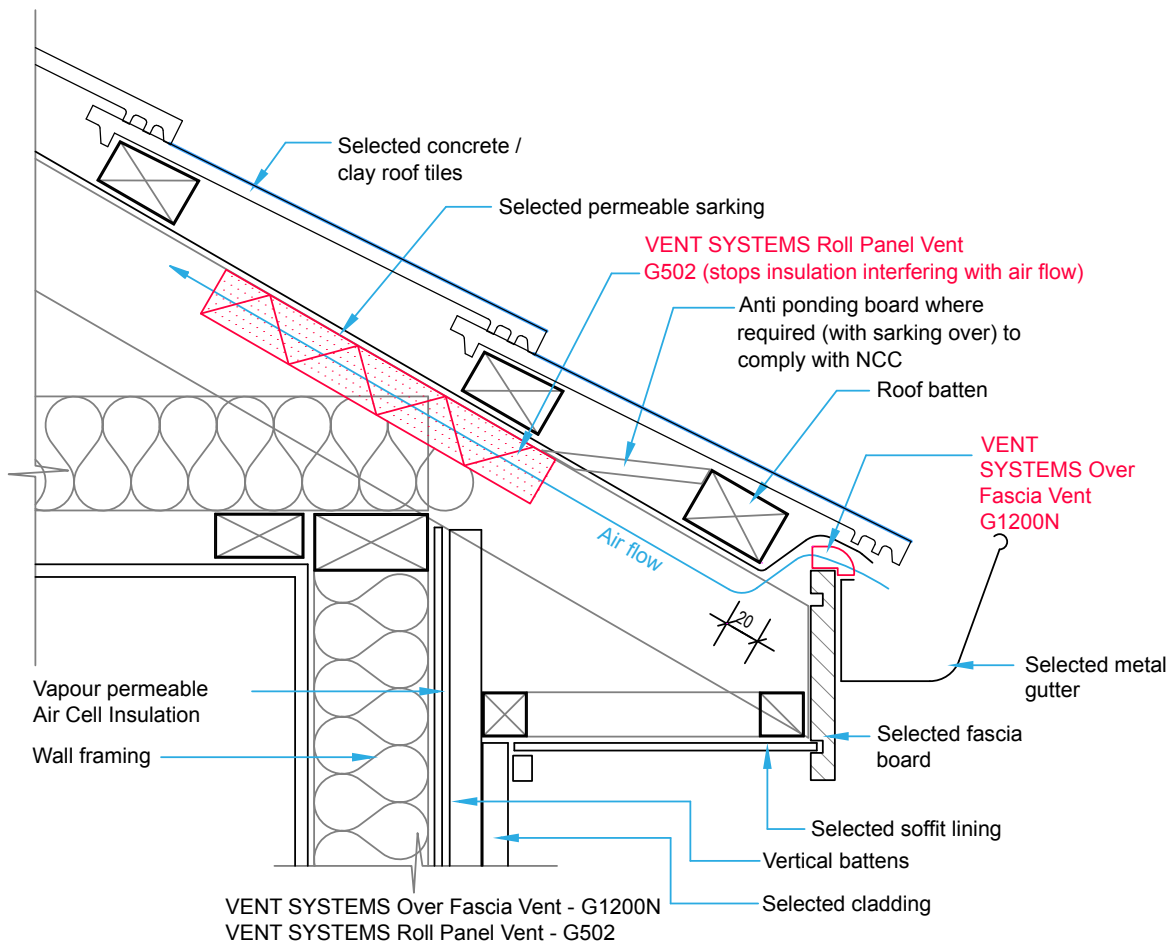

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

NOTE: Diagrams are for guidance purposes only. This is a suggested method of ventilation but the overall design and dimensions are the responsibility of the designer in compliance with the NCC, individual state requirements and AS3959 in bush fire prone areas.